

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number  
**WO 2004/002316 A1**

(51) International Patent Classification<sup>7</sup>: **A61B 6/06**

(21) International Application Number:  
PCT/IB2003/002904

(22) International Filing Date: 19 June 2003 (19.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
102 28 941.7 28 June 2002 (28.06.2002) DE

(71) Applicant (for DE only): **PHILIPS INTELLECTUAL  
PROPERTY & STANDARDS GMBH** [DE/DE]; Stein-  
damm 94, 20099 Hamburg (DE).

(71) Applicant (for all designated States except DE, LC, LK,  
LR, LS, LT, LU, LV, MA, MC, MD, MG, MK, MN, MW, MX,

MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,  
SG, SK, SL, SZ, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW): **KONINKLIJKE PHILIPS  
ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1,  
NL-5621 BA Eindhoven (NL).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **SCHLOMKA,  
Jens-Peter** [DE/DE]; c/o Philips Intellectual Property &  
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).  
**HARDING, Geoffrey** [GB/DE]; c/o Philips Intellectual  
Property & Standards GmbH, Weissshausstr. 2, 52066  
Aachen (DE).

(74) Agent: **MEYER, Michael**; Philips Intellectual Property &  
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,

[Continued on next page]

(54) Title: COMPUTED TOMOGRAPHY APPARATUS

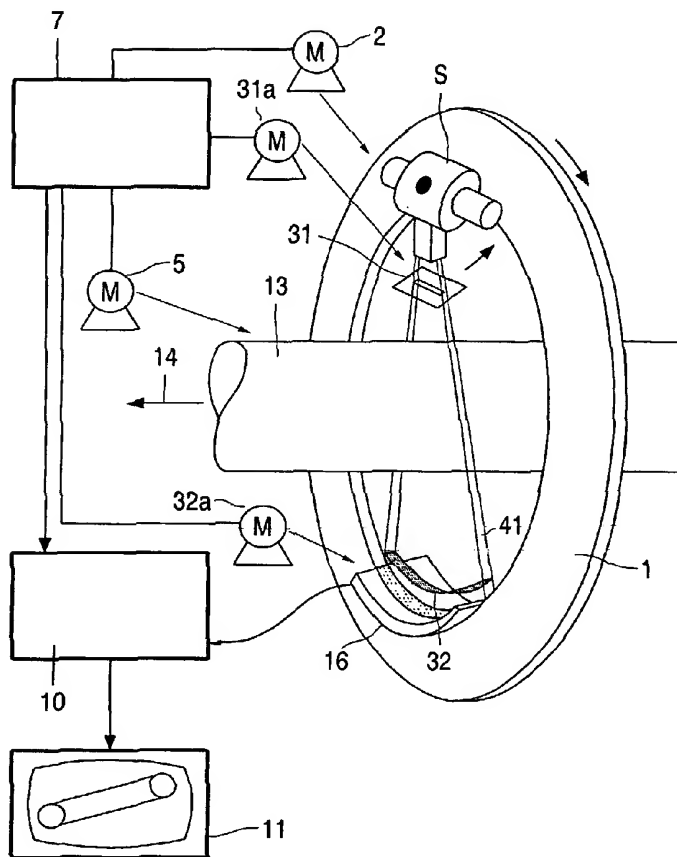

(57) Abstract: The invention relates to a computed tomography apparatus (CT apparatus) for imaging by means of radiation having traversed an object to be examined (that is, directly transmitted radiation), as well as by means of radiation scattered by the object to be examined, which apparatus includes a radiation source (S), a detector arrangement (16) and a device whereby the radiation (41a) having traversed the object to be examined can be blocked at least to an extent that the intensity incident on the detector arrangement (16) does not substantially exceed the intensity of radiation (41b) scattered by the object (13) to be examined and incident on the detector arrangement (16). The invention enables the detection of scattered radiation (CSCT mode) which is not affected by crosstalk from the transmitted radiation, even when the detector arrangement does not satisfy severe requirements as regards crosstalk properties and/or is configured as a single-row detector arrangement.

WO 2004/002316 A1



LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## Computed tomography apparatus

The invention relates to a computed tomography apparatus (CT apparatus) for imaging by means of radiation having traversed an object to be examined (that is, directly transmitted radiation), as well as by means of radiation scattered by the object to be examined.

5           A CT apparatus of this kind is known, for example, from EP 1 127 546. It comprises essentially a radiation source for generating a fan beam which traverses an object to be examined, as well as a two-dimensional detector arrangement which consists of a plurality of individual detector elements which are arranged in rows and columns in conformity with the length and the width, respectively, of the cross-section of the fan beam.  
10   The number of columns generally is substantially larger than the number of rows and the longitudinal dimension of the detector arrangement is substantially larger than its dimension in the direction of the width of the cross-section of the fan beam.

          The angle of aperture of the fan beam in the direction of its width (that is, in the direction perpendicular to the fan plane) can be varied by means of diaphragm devices.  
15   When the radiation having traversed the object to be examined (the transmitted radiation) is to be detected as well as the radiation scattered by the object, such a diaphragm device is selected that a comparatively small width of the fan beam is obtained. In that case the directly transmitted radiation is detected essentially by the central row of the detector arrangement, whereas the scattered radiation, being directed away from the plane of the fan beam to both  
20   sides, is incident on the outer rows of the detector arrangement.

          In order to optimize the pulse momentum transfer spectrum, furthermore, a collimator arrangement which consists of a plurality of lamellas is arranged between the object to be examined and the detector arrangement, which lamellas subdivide the fan beam into a number of segments so that the detector elements that are situated in one column are  
25   struck by transmitted and scattered radiation from the same segment of the object to be examined.

          However, it has been found that the detection of the scattered radiation by means of in particular those detector rows which adjoin the central row (rows) is disturbed by crosstalk due to the incidence of the transmitted radiation which is significantly more intense

for given objects to be examined. This problem may become more serious notably when use is made of detector arrangements having a comparatively small width such as included in some known CT apparatus.

If, moreover, single-row detector arrangements are used, generally speaking,  
5 detection of the scattered radiation is even impossible by means of such CT apparatus.

Therefore, it is an object of the invention to provide a CT apparatus of the kind set forth whereby the radiation scattered by an object to be examined can be detected at least substantially without being affected by radiation having traversed the object to be examined (that is, transmitted radiation).

10 It is also an object of the invention to provide a CT apparatus whereby the radiation scattered by an object to be examined can be detected at least substantially without being affected by radiation having traversed the object, that is, even when use is made of a detector arrangement comprising only one detector row or only a few detector rows.

Finally, it is also an object of the invention to provide a CT apparatus whereby  
15 transmitted and scattered radiation (CT and CSCT mode) can be detected simultaneously when use is made of a multi-row detector arrangement, without the measurement of the scattered radiation being significantly affected by crosstalk from the transmitted radiation.

In conformity with claim 1 the object is achieved by means of a computed tomography apparatus which includes a radiation source, a detector arrangement and a device  
20 with which (transmitted) radiation having traversed an object to be examined can be stopped at least to such an extent that its intensity which is incident on the detector arrangement does not significantly exceed the intensity of radiation scattered by the object to be examined and incident on the detector arrangement.

It has been found that the required degree of stopping is dependent essentially  
25 on the quality of the detector arrangement and notably on the crosstalk attenuation thereof as well as on the desired image quality. The less the crosstalk between neighboring detector elements or detector rows and the lower the requirements imposed on the image quality, the lower the adjusted degree of said stopping may be.

A special advantage of this solution resides in the fact that the simultaneous  
30 detection of transmitted and scattered radiation can also be carried out by means of detector arrangements which do not satisfy severe requirements in respect of their crosstalk properties, so that additionally costs can be saved.

It is to be noted that US 6,175,117 discloses a tissue analysis device which includes a beam-forming device for the analysis of substances in the breast as well as a

detector for the detection of radiation transmitted and scattered by the breast, a filter which comprises a number of areas which are transparent to radiation and absorb the radiation being arranged in front of the filter. Apart from the fact that this device is not a computed tomography apparatus, this filter structure is provided for a detector arrangement which has a comparatively large surface area which cannot solve the problem to be solved in accordance with the invention, so that the cited publication is not considered to be of relevance.

The dependent claims relate to advantageous further embodiments of the invention.

The embodiments in conformity with the claims 2 and 7 offer the advantage that the transmitted and the scattered radiation can also be detected simultaneously when the detector arrangement is suitably proportioned.

The embodiment in conformity with claim 3 represents a particularly economical solution.

The embodiments disclosed in the claims 4 and 6 can also be implemented at a later stage, while using limited means only, in already existing computed tomography apparatus.

The embodiments disclosed in the claims 5 and 9 enable measurement of the scattered radiation at different angles relative to an object to be examined.

Further details, features and advantages of the invention will become apparent from the following description of preferred embodiments which is given with reference to the drawing. Therein:

Fig. 1 shows diagrammatically the essential components of a CT apparatus in accordance with the invention;

Fig. 2 shows a first embodiment of the invention;

Fig. 3 shows a second embodiment of the invention;

Fig. 4 shows a third embodiment of the invention;

Fig. 5 shows a fourth embodiment of the invention, and

Fig. 6 shows a fifth embodiment of the invention.

Fig. 1 is a diagrammatic representation of the essential components of a CT apparatus in accordance with the invention. The apparatus includes a gantry 1 which can be rotated about an axis of rotation 14 by means of a first motor 2. On the circumference of the gantry 1 there is mounted a radiation source S, for example, an X-ray source, which includes a first collimator 31 whereby a radiation beam 41 (primary radiation) can be generated. After said radiation beam 41 has traversed the examination zone in which an object 13 to be

examined is situated and/or after it has been scattered therein, it is incident on a second collimator 32 as well as on a detector arrangement 16.

The detector arrangement 16 is composed of a plurality of detector elements which are arranged in the form of a matrix which comprises at least one row and a plurality of columns. The detector rows extend in the circumferential direction of the gantry 1 whereas the columns extend perpendicularly thereto. The detector arrangement 16 and the second collimator 32 are also attached to the gantry 1.

The object 13 to be examined can be displaced in the direction of the axis of rotation 14 of the gantry by means of a second motor 5.

Using a first drive unit 31a, the first collimator 31 or the radiation source S can be displaced in a direction perpendicular to the plane of the gantry 1. Alternatively or additionally, there is provided a second drive unit 32a whereby the second collimator 32 and the detector arrangement 16 can also be displaced in a direction perpendicular to the plane of the gantry 1.

A control unit 7 is provided for controlling the motors 2, 5 and the drive units 31a, 32a, said control unit itself being connected to an image processing computer 10. The detector arrangement 16 is also connected to the computer 10 which processes the detector signals and forms an image of the object 13 to be examined on a monitor 11.

As is also shown in Fig. 1, the radiation source S and the first collimator 31 produce a fan-shaped radiation beam 41 (fan beam). The angle of aperture of the fan beam in the plane of the gantry 1 and the length of the detector arrangement 16 in the circumferential direction of the gantry 1 are preferably adapted to one another in such a manner that the entire length of the detector arrangement 16 can be exposed. The width of the fan beam in the direction perpendicular to the fan plane defined by the angle of aperture, however, is substantially smaller and preferably proportioned to be such that it covers only one detector row or only a few detector rows of the detector arrangement 16.

Alternatively, the radiation source S and the collimator 31 may also be proportioned in such a manner that a conical radiation beam is generated.

In order to optimize the pulse momentum transfer spectrum it is again possible to arrange, as described in the cited EP 1 127 546, a collimator arrangement in the form of a plurality of lamellas between the object 13 to be examined and the detector arrangement 16, which lamellas subdivide the radiation beam 41 into a number of segments in such a manner that the detector elements present in one column are struck by transmitted and scattered

radiation from the same segment of the object 13 to be examined. Therefore, the publication EP 1 127 546 is incorporated in this description by way of reference.

The Figs. 2 to 4 are side elevations taken in a direction parallel to the plane of the gantry 1 (that is, essentially also parallel to the plane of the fan beam 41. These Figures diagrammatically show the radiation source S, the first collimator 31, the object 13 to be examined, the second collimator 32 as well as the detector arrangement 16.

As can also be seen in Fig. 2, in the first embodiment of the invention the (transmitted) radiation 41a having traversed the object 13 to be examined is completely stopped by a central region 321 of the second collimator 32, so that it is no longer incident on the detector arrangement 16. The radiation 41b scattered by the object 13 to be examined, however, can reach the detector arrangement 16 without being obstructed, that is, via openings in the second collimator 32 which are situated laterally of the central region 321.

In the second embodiment as shown in Fig. 3 this object is achieved thanks to the fact that the detector arrangement 16 and the second collimator 32 (in as far as necessary) have been shifted laterally with respect to the (central) position shown in Fig. 2, that is, in a direction perpendicular to the plane of the gantry 1 and hence to the plane of the fan beam 41; they have been shifted to such an extent that the transmitted radiation 41a is directed so as to bypass the detector arrangement 16 and/or is incident on a region of the second collimator 32 which is not transparent to this radiation. The scattered radiation 41b emanating from the object 13 to be examined is incident on the detector arrangement 16 via an appropriate opening in the second collimator 32. The shift of the second collimator 32 and the detector arrangement 16 can be realized in steps, by way of the control unit 7 and the second drive unit 32a, in order to detect and evaluate scattered radiation 41b with different scatter angles.

In the embodiment shown in Fig. 4, however, the first collimator 31 is shifted relative to the (central) position shown in the Figs. 2 and 3 in a direction perpendicular to the plane of the gantry 1, whereas the second collimator 32 and the detector arrangement 16 remain in the position shown in Fig. 2, so that the transmitted radiation 41a traverses the object 13 to be examined at an angle relative to the plane of the gantry 1 and hence is not directed onto the detector arrangement 16. The scattered radiation 41b, however, is again incident on the detector arrangement 16 via an appropriate opening in the second collimator 32. In order to detect and evaluate scattered radiation 41b with different scatter angles, the first collimator 31 can again be displaced in steps in said direction by way of the control unit 7 and the first drive unit 31a. Alternatively, instead of displacing the first collimator 31, the radiation source S can be displaced in the opposite direction.

The above three embodiments enable unobstructed detection and evaluation of the scattered radiation 41b by means of a single-row detector arrangement as well as by means of a multi-row detector arrangement 16.

The principles illustrated in the Figs. 2 to 4, in conformity with which the transmitted radiation 41a is blocked and only the scattered radiation 41b is directed onto the detector arrangement 16, can also be reversed if necessary, that is, in such a manner that the scattered radiation 41b is blocked at least substantially and the transmitted radiation 41a is incident on the detector arrangement 16.

However, if the transmitted radiation and the scattered radiation are to be detected simultaneously, preferably the first embodiment as shown in Fig. 2 is modified in conformity with Fig. 5 or Fig. 6.

The Figs. 5 and 6 are side elevations, at an enlarged scale relative to Fig. 2, of a part of a detector arrangement 16 which comprises a plurality of detector rows which extend in a direction parallel to the plane of the fan beam 41.

As opposed to the first embodiment as shown in Fig. 2, in the fourth and the fifth embodiment as shown in the Figs. 5 and 6 the central region 321 of the second collimator 32 does not completely block the transmitted radiation 41a, but partly lets this radiation through so that its intensity is only so high that the detection of the scattered radiation 41b is not influenced or disturbed by crosstalk from the transmitted radiation 41 in neighboring detector rows.

To this end, the central region 321 of the second collimator 32 contains a material of an appropriate thickness which absorbs the radiation in the fourth embodiment as shown in Fig. 5.

In the fifth embodiment as shown in Fig. 6 the central region 321 of the second collimator 32 is provided with an opening in the form of a narrow gap or slit wherethrough only a part of the radiation can pass.

For the proportioning of the absorptivity of the central region 321 or the width and length of the opening in this region 321 the fact must be taken into account that, in dependence on the object density, the intensity of the transmitted radiation 41a may be a factor of from 10 to 1000 higher than the intensity of the scattered radiation 41b. The attenuation of the transmitted radiation intensity should preferably also be of this order of magnitude, so that the transmitted radiation 41a and the scattered radiation 41b are incident on the detector arrangement 16 with approximately the same intensity.



If necessary, of course, this principle can also be reversed when the central region 321 is arranged in the path of the scattered radiation in order to attenuate the scattered radiation 41b relative to the transmitted radiation 41a for some reason.

5 A special advantage of the invention resides in the fact that it enables switching over between the imaging and evaluation on the basis of the transmitted radiation (CT mode) and the imaging and evaluation on the basis of the coherent scattered radiation (CSCT mode) during the examination of an object. Significantly better examination results can thus be achieved. This holds for diagnoses in the medical field as well as for the examination of materials.

## CLAIMS:

1. A computed tomography apparatus which includes a radiation source (S), a detector arrangement (16) and a device with which radiation (41a) having traversed an examination zone can be stopped at least to such an extent that its intensity which is incident on the detector arrangement (16) does not significantly exceed the intensity of radiation (41b) scattered in the examination zone (13) and incident on the detector arrangement (16).

2. A computed tomography apparatus as claimed in claim 1, in which the radiation source (S) is arranged to form an essentially fan-shaped radiation beam (41) and the detector arrangement (16) comprises a plurality of detector elements which are arranged in rows and columns in conformity with the length and the width, respectively, of the cross-section of the radiation beam (41) in the detector plane.

3. A computed tomography apparatus as claimed in claim 1, in which the detector arrangement (16) comprises a plurality of detector elements which are arranged in a row.

4. A computed tomography apparatus as claimed in claim 1, in which the device includes a first collimator (31) which is arranged on the radiation source (S), the radiation source (S) or the first collimator (31) being arranged so as to be offset relative to one another in a direction perpendicular to a propagation direction of the radiation beam (41) in such a manner that the radiation (41a) having traversed the object to be examined at least is not incident to a significant extent on the detector arrangement (16).

5. A computed tomography apparatus as claimed in claim 4, in which the device includes a first drive unit (31a) for displacing the radiation source (S) or the first collimator (31) relative to one another in such a manner that scattered radiation (41b) emanating from the object (13) to be examined at different angles can be detected.

6. A computed tomography apparatus as claimed in claim 1, in which the device includes a second collimator (32) which is arranged between the object (13) to be examined and the detector arrangement (16) and includes a region (321) whereby the radiation (41a) having traversed the object to be examined is stopped at least partly.

5

7. A computed tomography apparatus as claimed in claim 6, in which the region (321) is provided with an opening wherethrough a part of the radiation (41a) incident on the region (321) reaches the detector arrangement (16).

10

8. A computed tomography apparatus as claimed in claim 1, in which the device is formed by a detector arrangement (16) which is positioned so as to be shifted in a direction perpendicular to a propagation direction of the radiation beam (41) in such a manner that the radiation (41a) having traversed the object to be examined is directed at least substantially so as to bypass the detector arrangement (16).

15

9. A computed tomography apparatus as claimed in claim 8, in which the device includes a second drive unit (32a) for displacing the detector arrangement (16) in such a manner that scattered radiation (41b) emanating from the object (13) to be examined at different angles can be detected.

1/2

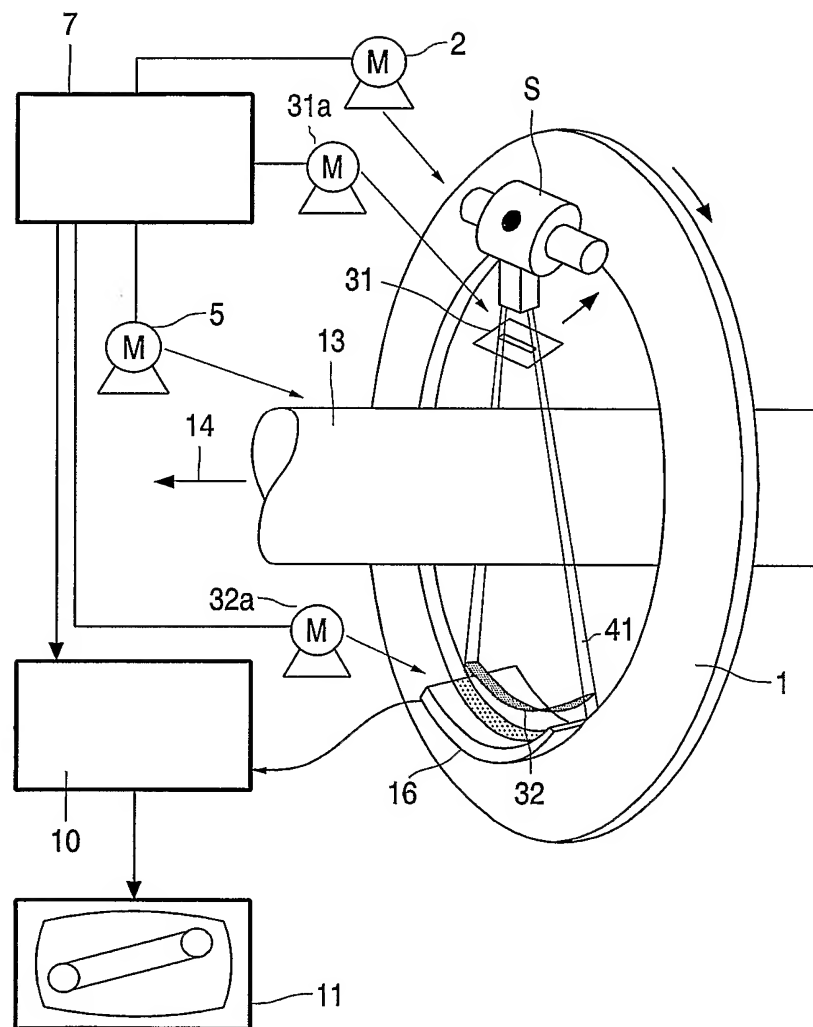


FIG. 1

2/2

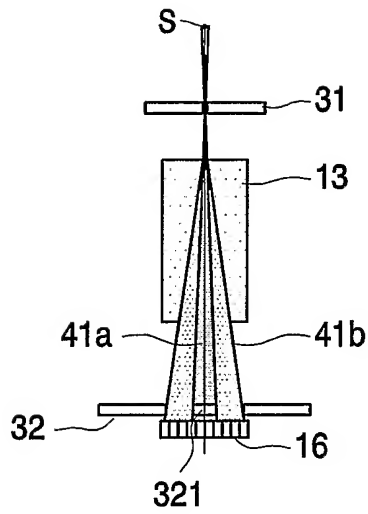


Fig.2

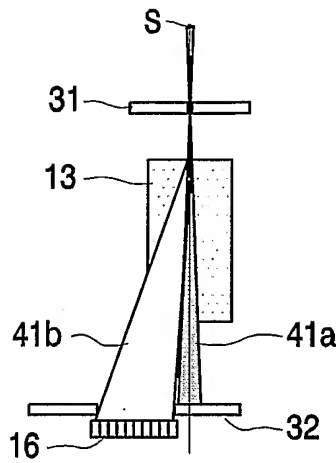


Fig.3

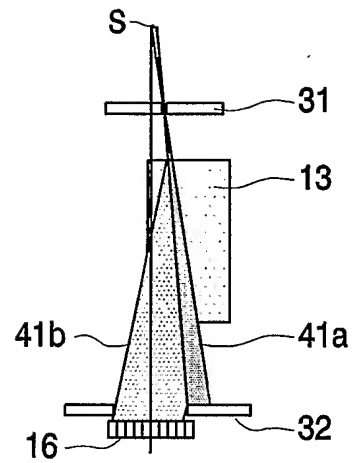


Fig.4




Fig.5

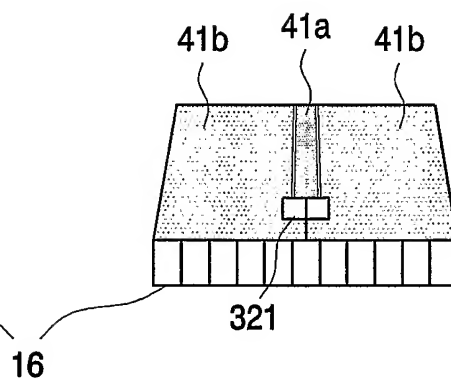


Fig.6

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/IB 03/02904

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61B6/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B G21K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 49939 A (KOMARDIN OLEG; LAZAREV PAVEL (US); QUANTA VISION (US)) 12 November 1998 (1998-11-12) page 11, line 8 - line 13 page 12, line 5 - line 12 page 13, line 1 - line 15 page 17, line 23 - page 18, line 1 page 24, line 13 - line 17 ---	1-8
X	EP 1 062 914 A (QUANTA VISION INC) 27 December 2000 (2000-12-27) paragraph '0001! column 12, line 26 - line 29 paragraphs '0041!, '0042! ---	1-4, 6-8
P, X	DE 101 27 267 A (SIEMENS AG) 19 December 2002 (2002-12-19) paragraphs '0027!, '0033!, '0034! ---	1-7
-/-		

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

20 October 2003

Date of mailing of the international search report

03/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Knüpling, M

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	STONESTROM J P ET AL: "Scatter considerations in fan beam computerized tomographic systems" IEEE TRANSACTIONS ON NUCLEAR SCIENCE, OCT. 1976, USA, vol. ns-23, no. 5, pages 1453-1458, XP002258471 ISSN: 0018-9499 page 1457, right-hand column figures 6A,6B.	1-4,6
A	US 2 549 987 A (HAMACHER EDWARD A ET AL) 24 April 1951 (1951-04-24) figure 1	1,9

# INTERNATIONAL SEARCH REPORT

II Information on patent family members

International Application No

PCT/ 03/02904

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9849939	A	12-11-1998	RU 2137114 C1 US 6054712 A AU 7368798 A EP 0983020 A1 JP 2001524011 T WO 9849939 A1 US 6175117 B1	10-09-1999 25-04-2000 27-11-1998 08-03-2000 27-11-2001 12-11-1998 16-01-2001
EP 1062914	A	27-12-2000	RU 2145485 C1 AU 3280499 A EP 1062914 A1 JP 2002505903 T WO 9945843 A1	20-02-2000 27-09-1999 27-12-2000 26-02-2002 16-09-1999
DE 10127267	A	19-12-2002	DE 10127267 A1	19-12-2002
US 2549987	A	24-04-1951	BE 488126 A CH 272092 A FR 983754 A GB 660703 A NL 72976 C NL 145607 B	30-11-1950 27-06-1951 14-11-1951